

End-Fed $\frac{1}{2}$ λ Dipole Antenna with Universal FME-Connection System for Portable Equipment in the 1300 M

DESCRIPTION

- Flexible antenna made of steel wire covered with black silicone tubing.
- End-fed $\frac{1}{2}$ λ whip – groundplane independent.
- High gain and efficient decoupling from the portable equipment due to half-wave design.
- 5 dB gain compared to a $\frac{1}{4}$ λ antenna whip on the same equipment.
- Highest quality materials in a long-lasting and durable design.
- Delivered factory tuned to customer specified frequency.
- Provided with universal FME-connection system for optimum flexibility and easily exchangeable connectors.
- Designed for use with the following of Procom's line of black FME-connectors (to be ordered separately): BFME-BNC, BFME-TNC, BFME-N, BFME-MUHF, BFME-EBNC, BFME-ETNC and BFME-EMUHF.



ORDERING


Type	Product No.
FLX 1300/...-FME	140000218

SPECIFICATIONS


Electrical	
Model	FLX 1300/...-FME
Frequency	1200 - 1300 MHz
Antenna Type	End-fed $\frac{1}{2}$ λ antenna for portable equipment
Polarisation	Vertical
Impedance	50 Ω
Gain	5 dB (compared to a $\frac{1}{4}$ λ portable antenna)
VSWR	< 1.3:1 @ f. res.
Maximum Input Power	25 W
Mechanical	
Connection(s)	FME female (Exchangeable BFME-connectors to be ordered separately)
Materials	Silicone tube over flexible steel wire Black-chromed brass
Colour	Black
Height	150 mm / 5.91 in.
Weight	0.025 kg / 0.06 lb

ADDITIONAL DATA

TYPICAL SWR CURVE

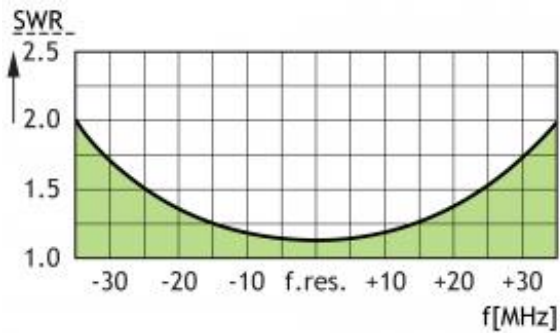

RECOMMENDED BFME-CONNECTORS

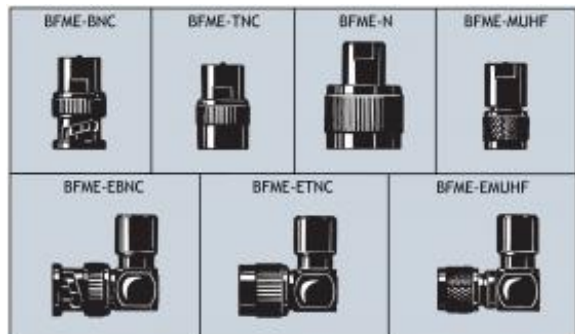

(To be ordered separately)

PLEASE NOTE

The FLX 1300 is also available with SMA male connector, but in this case with fixed, non-exchangeable connector (not FME-connection system). Information on this special version on request.