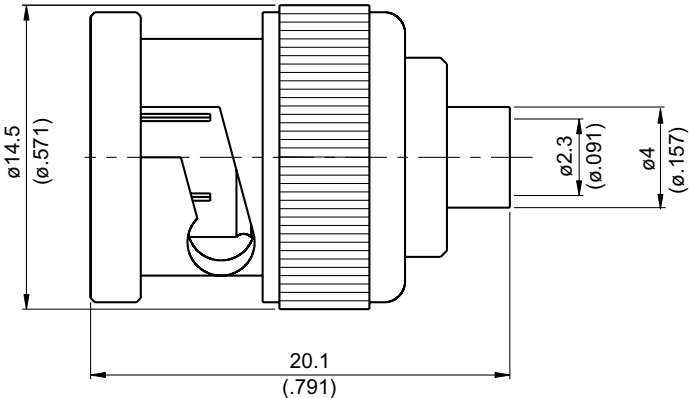


BNC3300-0085	BNC Plug Solder	50Ω																											
																													
<table><tr><th>Parts</th><th>Material</th><th>Plating (Micro-inch)</th></tr><tr><td>Contact Pin</td><td>Brass</td><td>Gold 3 Over Nickel 50 Over Copper 50</td></tr><tr><td>Gasket</td><td>Silicone</td><td></td></tr><tr><td>Spring</td><td>SK5</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Washer</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Barrel</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Insulator</td><td>Teflon</td><td></td></tr><tr><td>Body</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Coupling Nut</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr></table>			Parts	Material	Plating (Micro-inch)	Contact Pin	Brass	Gold 3 Over Nickel 50 Over Copper 50	Gasket	Silicone		Spring	SK5	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Barrel	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Insulator	Teflon		Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Parts	Material	Plating (Micro-inch)																											
Contact Pin	Brass	Gold 3 Over Nickel 50 Over Copper 50																											
Gasket	Silicone																												
Spring	SK5	Tin-Zinc-Copper-Alloy 100 Over Copper 50																											
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																											
Barrel	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																											
Insulator	Teflon																												
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																											
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																											
Weight: 8.38 g Suitable Cables: Semi-rigid.085																													

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

CABLE ASSEMBLY INSTRUCTION

BNC3300-0085

JYE BAO CO., LTD.

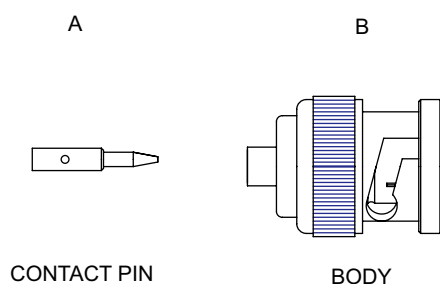


DIAGRAM	ASSEMBLY INSTRUCTION
	Step 1: STRIP AS SHOWN.
	Step 2: PUT 0.51 MM GAGE IN PLACE, INSERT CABLE'S CENTER CONDUCTOR INTO CENTER PIN AND SOLDER IN "Y".
	Step 3: INSERT PREPARED CABLE INTO CONNECTOR BODY "B" AND USE SOLDERING FIXTURE "ST-008", INSERT TOOL "ST-009" AND LOCATOR TOOL "ST-011" TO FIX THE CONNECTOR. SOLDER IN "X".

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.