




SMA8300L-0085

## SMA Jack Solder For Bulkhead 50Ω



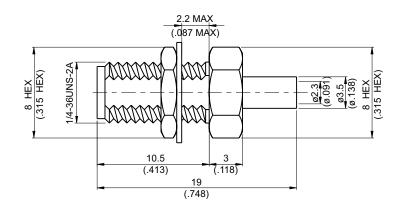

## **MOUNTING HOLE:**



| Parts       | Material         | Plating (Micro-inch)                  |
|-------------|------------------|---------------------------------------|
| Hex Nut     | Brass            | Gold 5 Over Nickel 50 Over Copper 50  |
| Lock Washer | Brass            | Gold 5 Over Nickel 50 Over Copper 50  |
| Contact Pin | Beryllium Copper | Gold 20 Over Nickel 50 Over Copper 50 |
| Insulator   | Teflon           |                                       |
| Body        | Brass            | Gold 5 Over Nickel 50 Over Copper 50  |

Weight: 3.54 g

Suitable Cables: Semi-rigid.085

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.



## CABLE ASSEMBLY INSTRUCTION SMA8300L-0085 JYE BAO CO., LTD. С Α В INSULATOR CONTACT PIN **BODY+HEX NUT** +LOCK WASHER DIAGRAM ASSEMBLY INSTRUCTION [.098] Step 1: STRIP AS SHOWN. USE 0.3MM GAGE Step 2: INSERT CABLE'S CENTER CONDUCTOR INTO CENTER PIN AND SOLDER IN "Y", USE 0.3 MM GAGE. ST-009 Step3: PUT CABLE INTO SOLDERING FIXTURE "ST-008". AND LOCK IT. PUT CONNECTOR AS SHOWN. Step4: SCREW LOCATOR TOOL "ST-011" TO THE POSITION AS SHOWN IN "S", AND SOLDER IN "X". ST-011 Step5: USE DIELECTRIC INSERTION TOOL "ST-004" TO INSERT THE TEFLON "A".

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.