


REVISION				
ASS. REV.	CON. REV.	DESCRIPTON	DATE	APPROVED
T	T	INITIAL RELEASE	2021/11/05	

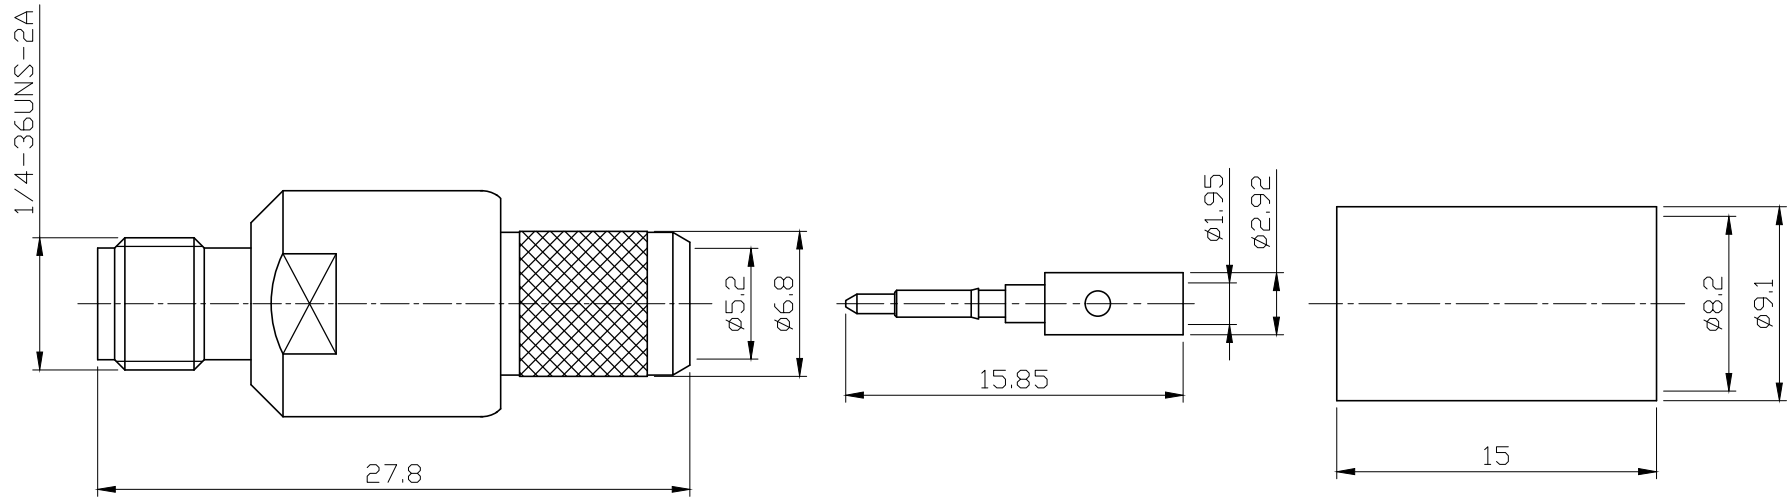

VSWR 1.2 : 1 UP TO 6GHz

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS.
2. TIN-ZINC-COPPER-ALLOY PL. 100 MIN.
OVER COPPER PL. 50 MIN.
3. GOLD PL. 4 MIN. OVER NICKEL-PHOSPHORUS ALLOY
PL. 80 MIN. OVER COPPER PL. 20 MIN.

5. GOLD PL. 4 MIN. OVER NICKEL-100 HOURS ALLOY PL. 80 MIN. OVER COPPER PL. 20 MIN.							DIMENSION ARE MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES (UNIT: MM)	SCALE 3 / 1	ASSEMBLY REV. T	CONNECTOR REV. T	UNIT MM	JYE BAO CO., LTD. TAIPEI TAIWAN	
5	FERRULE	COPPER	NOTE 2	1	N3100-5DFB-8/W	B	0-0.5 = ±0.03	APPROVED					TITLE SMA JACK CRIMP
4	BARREL	NOTE 1	NOTE 2	1	SMA8100-05DF-4/W	T	0.5-5 = ±0.05	DATE					
3	CONTACT PIN	NOTE 1	NOTE 3	1	SMA9100-05DF-3/NM	T	5~10 = ±0.07	CHECKED	TESTER	DATE			
2	INSULATOR	TEFLON		1	SMA3100-L300-3	-	10~20 = ±0.10	DATE		DATE			
1	BODY	NOTE 1	NOTE 2	1	SMA8100-05DF-1/W	T	20~30 = ±0.15	DRAWING				DRAWING NO.	
NO.	DESCRIPTION	MATERIAL	FINISH	QTY	PART NO.	REV	30~ = ±0.20	DATE				SMA9100-05DF	
							ANGLE ±5°						