


RMC 12-CH

PRODUCT DESCRIPTION

RMC 12-CH-HLFR

Reference suffix ⁽¹⁾ : -HLFR

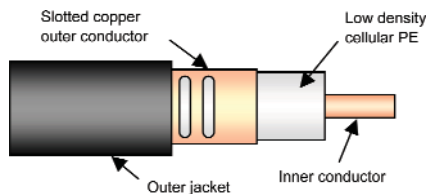

Fire behaviour

Halogen free and flame retardant outer sheath
 Low corrosive gas emission acc. to IEC 60754-2
 Flame retardant acc. to IEC 60332-1 and IEC 60332-3 cat. C
 Low smoke emission acc. to IEC 61034

Slots in the copper outer conductor allow a controlled portion of the internal RF energy to be radiated into the surrounding environment. Conversely, a signal transmitted near the cable will couple into the slots and be carried along the cable length.

FEATURES and BENEFITS

- Low Fading at short Aerial to Cable distance
- Robust Cable
- Main Applications: WLAN controlled Transportation Systems
- Optimised for WLAN applications in the 5.15 - 5.35 and 5.47 - 5.85 GHz bands

TECHNICAL FEATURES

• Size		1/2"
• Previous Model Number		N.A.
• Frequency Range	MHz	5000 - 6000
• Recommended for Frequency	MHz	5150 - 5350 and 5470 - 5850
• Cable Type		RMC (Radiated Mode Cable)
• Jacket		HLFR (Halogen Free Low Smoke Flame Retardant)
• Slot Design		Groups of Slots at short intervals
• Impedance	Ω	50 +/- 3
• Velocity Ratio	%	88
• Capacitance	pF/m	76
• Inner Conductor dc Resistance	$\Omega/1000\text{ m } (\Omega/1000\text{ ft})$	1.48 (0.45)
• Outer Conductor dc Resistance	$\Omega/1000\text{ m } (\Omega/1000\text{ ft})$	2.8 (0.85)
• Inner Conductor Material		Copper clad aluminium wire
• Dielectric Material		Cellular polyethylene
• Outer Conductor Material		Overlapping copper foil, with slot groups, bonded to the jacket



TECHNICAL DATA SHEET

Radiating Cables

Kabelwerk

EUPEN AG

Rev.: 02/2009-08-17

cable

2/2

RMC 12-CH

TECHNICAL FEATURES (continued)

• Diameter Inner Conductor	mm (in)	4.8 (0.19)		
• Diameter Dielectric	mm (in)	12.4 (0.49)		
• Diameter over Jacket	mm (in)	15.5 (0.61)		
• Minimum Bending Radius, Single Bend	mm (in)	200 (7.87)		
• Cable Weight	kg/m (lb/ft)	0.232 (0.16) HLFR		
• Tensile Strength	daN (lb)	110 (243)		
• Indication of Slot Alignment	embossed line 180° opposite			
• Storage Temperature	°C (°F)	-70 to +85 (-94 to +185)		
• Installation Temperature	°C (°F)	-25 to +60 (-13 to +140)		
• Operation Temperature	°C (°F)	-40 to +85 (-40 to +185)		
• Longitudinal Loss and Coupling Loss ⁽²⁾				
	Frequency	Longitudinal Loss	Coupling Loss	
		dB/100 m (dB/100 ft)	C50% [dB]	C95% [dB]
	5200 MHz	19.1 (5,82)	62	71
	5500 MHz	20.0 (6,10)	60	61
	5800 MHz	21.5 (6,55)	55	59
• Resonant Frequencies	MHz	415, 1246, 2077, 2907, 3738, 4568, 5399, 6230		
• Clamp Spacing Recommended / Maximum	m (ft)	0.5 (1.64) / 1.20 (3.90)		
• Distance to Wall Recommended / Minimum	mm (in)	80 - 180 (3.15 - 7.00) / 50 (1.96)		

¹⁾ Must be specified in case of order - standard PE jacket available on request.

⁽²⁾ Measured in tunnel according to IEC 61196-4 - Ground Level Method.

Distance = 2m. C50 & (C95) are the average coupling losses with 50% (95%) probability calculated in accordance with the standard.

The above stated values are nominal values and subject to manufacturing tolerances as follows: Longitudinal Loss +/- 5 % and Coupling Loss +/- 3dB.

As with any radiating cable, the performance in building or tunnel may deviate from figures measured according to the IEC 61196-4 standard.

Coupling loss measurements taken in accordance with IEC 61196-4 - Free Space Method are available on request