

Hand-Held Microphone for Mobile Equipment

DESCRIPTION

- General-purpose dynamic hand microphone.
- Used in conjunction with radio telephones in vehicles, ships and aircrafts.
- Sturdy ABS microphone housing.
- Hang-up hook on the back of housing.
- Built-in switch for control of auxiliary circuits.
- Hang-up clips available (Danmike Accessory items DM 300900 or DM 400900).



ORDERING



Type	Product No.
DM 1532	270000031

SPECIFICATIONS

Electrical	
Model	DM 1532
Type	Dynamic hand-held microphone
Pattern Type	Non-directional
Impedance	200Ω 30% at 1 kHz
Frequency Response	Shown in diagram below
Sensitivity	-55 dB " 3 dB at 1 kHz rel. 1 V/Pa
Mechanical	
Cartridge Type	Dynamic
Materials	Black ABS resin
Cable	3-wire coiled cord with shield. Extended: 1.2 m
Switch	Push-to-talk and switching of auxiliary circuit
Dimensions	103 (H) x 65 (W) x 67 (D) mm
Weight	0.16 kg / 0.35 lb
Accessories	Hang-up clips type DM 300900 or DM 400900
Environmental	
Operating Temperature Range	Operating : -25° C to + 55° C Storage : -40° C to + 55° C

ADDITIONAL DATA

TYPICAL RESPONSE CURVES

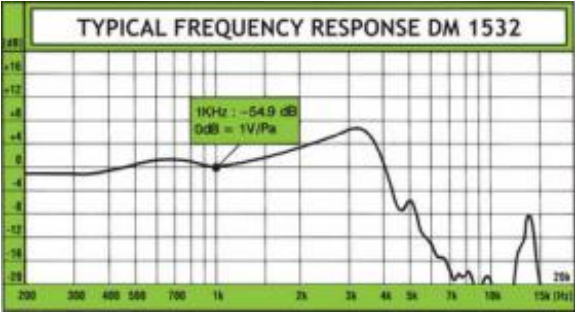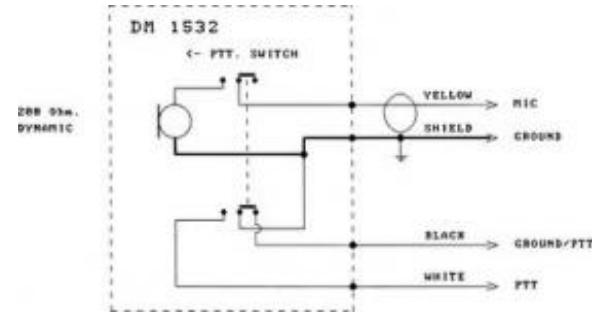

PLEASE NOTE

When the push-to-talk switch is depressed, the control circuit is closed before the microphone circuit is closed.

