

0 dBd Broad-Band Base Station and Marine Antenna for the 470 - 870 MHz Band

DESCRIPTION

- > Vertically polarized, omnidirectional base station and marine antenna.
- > Approximately 0 dBd gain.
- > Simple mounting using the 1" revolving nut system.
- > Wide variety of accessory mounting brackets available.
- > Large bandwidth (470 - 870 MHz) with respect to both SWR and gain.
- > The antenna element is sealed in a high-quality, conical glass-fibre tube.
- > The CXL 470-870 is a vibration-proof, lightweight, slim-line, corrosion resistant, modern style base station and marine antenna.
- > The CXL 470-870 is designed specially for both digital and analog communication systems.



ORDERING


Type	Product No.
CXL 470-870	100000226

SPECIFICATIONS


Electrical	
Model	CXL 470-870
Frequency	470 - 870 MHz
Antenna Type	Collinear, broad-band
3 dB Beamwidth, H-Plane	Omnidirectional
Polarisation	Vertical
3 dB Beamwidth, E-Plane	80 °
Impedance	50 Ω
Gain	2 dBi 0 dBd (see Gain Curve)
VSWR	< 2.5:1
Maximum Input Power	100 W
HCM Code(s)	
Mechanical	
Wind Area	0.013 sq. m / 0.14 sq. ft
Connection(s)	N(f)
Materials	Shroud: Polyurethane-coated glass fibre Mounting bracket: Chromed brass
Colour	White (RAL 9003)
Height	600 mm / 23.62 in.
Wind Load	20 N (160km/h)
Dia. At Top End	22.5 mm / 0.89 in.
Weight	0.35 kg / 0.77 lb
Dia. At Bottom End	23 mm / 0.91 in.
Mounting	On 1" RG (G1" - 11) threaded water pipe or on optional mounting brackets (see accessories)
Environmental	
Operating Temperature Range	-30 °C to +70 °C
Survival Wind Speed	200 km/h

DIAGRAM


ACCESSORIES (to be ordered separately)

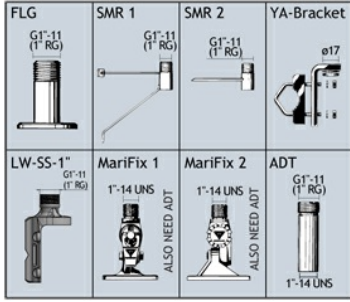


TYPICAL GAIN CURVE

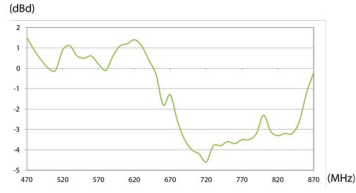


TYPICAL SWR CURVE




TYPICAL RADIATION PATTERN (E-PLANE) 470 Mhz

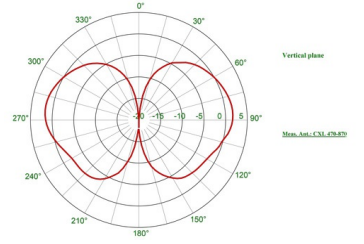

TYPICAL RADIATION PATTERN (E-PLANE) 670 Mhz



TYPICAL RADIATION PATTERN (E-PLANE) 770 Mhz



TYPICAL RADIATION PATTERN (E-PLANE) 870 Mhz

